




Pulley Design



Type A

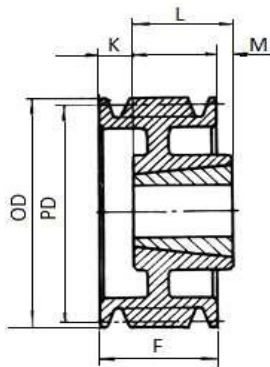


Type B

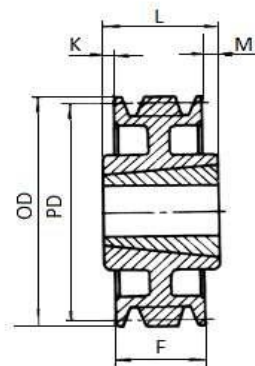


Type C



1- Solid



2- WDB



3- Arm/Spoke

Dimensions in ins

OD	PD	1 Groove F=11/16		F=3/4 -- 3v800 - 3v1600				2 Groove F=1 3/32					
				F=13/16 -3v1400 - 3v1900				Size	Bush	Type	K	L	L
		Size	Bush	Type	K	L	L						
2.65	2.6	1 3V 265 TB	1108	C1	3/16	7/8		2 3V 265 TB	1108	A1	7/32	7/8	-
2.80	2.75	1 3V 280 TB	1108	C1	3/16	7/8		2 3V 280 TB	1108	A1	7/32	7/8	-
3.00	2.95	1 3V 300 TB	1108	C1	3/16	7/8		2 3V 300 TB	1210	A1	3/32	1	-
3.15	3.1	1 3V 315 TB	1108	C1	3/16	7/8		2 3V 315 TB	1210	A1	3/32	1	-
3.35	3.3	1 3V 335 TB	1610	B1	-	1		2 3V 335 TB	1610	A1	3/32	1	-
3.65	3.6	1 3V 365 TB	1610	B1	-	1		2 3V 365 TB	1610	A1	3/32	1	-
4.12	4.07	1 3V 412 TB	1610	B1	-	1		2 3V 412 TB	1610	A1	3/32	1	-
4.50	4.45	1 3V 450 TB	1610	B1	-	1		2 3V 450 TB	1610	A1	3/32	1	-
4.75	4.7	1 3V 475 TB	1610	B1	-	1		2 3V 475 TB	1610	A1	3/32	1	-
5.00	4.9	1 3V 500 TB	1610	B1	-	1		2 3V 500 TB	1610	A1	3/32	1	-
5.30	5.25	1 3V 530 TB	1610	B1	-	1		2 3V 530 TB	1610	A1	3/32	1	-
5.60	5.55	1 3V 560 TB	1610	B1	-	1		2 3V 560 TB	1610	A1	3/32	1	-
6.00	5.95	1 3V 600 TB	1610	B1	-	1		2 3V 600 TB	1610	A1	3/32	1	-
6.50	6.45	1 3V 650 TB	1610	B1	-	1		2 3V 650 TB	1610	A1	3/32	1	-
6.90	6.85	1 3V 690 TB	1610	B2	-	1	5/16	2 3V 690 TB	2517	A1	3/32	1	-
8.00	7.95	1 3V 800 TB	2517	B2	-	1.3/4	1	2 3V 800 TB	2517	B2	-	1.3/4	21/32
10.60	10.55	1 3V 1060 TB	2517	B2	-	1.3/4	1	2 3V 1060 TB	2517	B2	-	1.3/4	21/32
14.00	13.95	1 3V 1400 TB	2517	B3	-	1.3/4	15/16	2 3V 1400 TB	2517	B3	-	1.3/4	21/32
19.00	18.95	1 3V 1900 TB	3020	B3	-	2	1.3/16	2 3V 1900 TB	3020	B3	-	2	29/32
25.00	24.95							2 3V 2500 TB	3020	C3	1/8	2	25/32

3V Taper Bushing Pulley

OD	PD	3 Groove F=1 1/2						4 Groove F=1 29/32					
		Size	Bush	Type	K	L	M	Size	Bush	Type	K	L	M
2.65	2.60	3 3V 265 TB	1108	A1	5/8	7/8	-	4 3V 265 TB	1108	A1	11/32	7/8	-
2.80	2.75	3 3V 280 TB	1108	A1	5/8	7/8	-	4 3V 280 TB	1108	A1	11/32	7/8	-
3.00	2.95	3 3V 300 TB	1210	A1	1/2	1	-	4 3V 300 TB	1210	A1	29/32	1	-
3.15	3.10	3 3V 315 TB	1210	A1	1/2	1	-	4 3V 315 TB	1210	A1	29/32	1	-
3.35	3.30	3 3V 335 TB	1610	A1	1/2	1	-	4 3V 335 TB	1610	A1	29/32	1	-
3.65	3.60	3 3V 365 TB	1610	A1	1/2	1	-	4 3V 365 TB	1610	A1	29/32	1	-
4.12	4.07	3 3V 412 TB	1610	A1	1/2	1	-	4 3V 412 TB	1610	A1	29/32	1	-
4.50	4.45	3 3V 450 TB	1610	A1	1/2	1	-	4 3V 450 TB	1610	A1	29/32	1	-
4.75	4.70	3 3V 475 TB	1610	A1	1/2	1	-	4 3V 475 TB	1610	A1	29/32	1	-
5.00	4.95	3 3V 500 TB	1610	A1	1/2	1	-	4 3V 500 TB	1610	A1	29/32	1	-
5.30	5.25	3 3V 530 TB	1610	A1	1/2	1	-	4 3V 530 TB	1610	A1	29/32	1	-
5.60	5.55	3 3V 560 TB	2517	A1	1/2	1	-	4 3V 560 TB	2517	A1	29/32	1	-
6.00	5.95	3 3V 600 TB	2517	B1	-	1.3/4	1/4	4 3V 600 TB	2517	A1	5/32	1.3/4	-
6.50	6.45	3 3V 650 TB	2517	B1	-	1.3/4	1/4	4 3V 650 TB	2517	A1	5/32	1.3/4	-
6.90	6.85	3 3V 690 TB	2517	B1	-	1.3/4	1/4	4 3V 690 TB	2517	A1	5/32	1.3/4	-
8.00	7.95	3 3V 800 TB	2517	B2	-	1.3/4	1/4	4 3V 800 TB	2517	A2	5/32	1.3/4	-
10.60	10.55	3 3V 1060 TB	2517	B2	-	1.3/4	1/4	4 3V 1060 TB	2517	A2	5/32	1.3/4	-
14.00	13.95	3 3V 1400 TB	2517	B3	-	1.3/4	1/4	4 3V 1400 TB	2517	A3	-	1.3/4	5/32
19.00	18.95	3 3V 1900 TB	3020	B3	-	2	1/2	4 3V 1900 TB	3030	B3	-	3	1.3/32
25.00	24.95	3 3V 2500 TB	3020	B3	-	2	1/2	4 3V 2500 TB	3030	B3	-	3	1.3/32
33.50	33.45	3 3V 3350 TB	3020	C3	1/4	2	1/4	4 3V 3350 TB	3030	C3	35/64	3	35/64

Dimensions in ins

OD	PD	5 Groove F=2 5/16							6 Groove F=2 23/32					
		Size	Bush	Type	K	L	M	Size	Bush	Type	K	L	M	
4.75	4.7	5 3V 475 TB	2517	A1	13/16	1.3/4	-	6 3V 475 TB	2517	A1	-	1.3/4	-	
5.00	4.95	5 3V 500 TB	2517	A1	13/16	1.3/4	-	6 3V 500 TB	2517	A1	-	1.3/4	-	
5.30	5.25	5 3V 530 TB	2517	A1	15/16	1.3/4	-	6 3V 530 TB	2517	A1	15/16	1.3/4	-	
5.60	5.55	5 3V 560 TB	2517	A1	15/16	1.3/4	-	6 3V 560 TB	2517	A1	15/16	1.3/4	-	
6.00	5.95	5 3V 600 TB	2517	A1	15/16	1.3/4	-	6 3V 600 TB	2517	A1	15/16	1.3/4	-	
6.50	6.45	5 3V 650 TB	2517	A1	15/16	1.3/4	-	6 3V 650 TB	2517	A1	15/16	1.3/4	-	
6.90	6.85	5 3V 690 TB	2517	A1	15/16	1.3/4	-	6 3V 690 TB	2517	A1	15/16	1.3/4	-	
8.00	7.95	5 3V 800 TB	2517	A2	15/16	1.3/4	-	6 3V 800 TB	2517	A2	15/16	1.3/4	-	
10.60	10.55	5 3V 1060 TB	2517	A2	15/16	1.3/4	-	6 3V 1060 TB	2517	A2	7/8	1.3/4	-	
14.00	13.95	5 3V 1400 TB	2517	A3	7/8	1.3/4	9/16	6 3V 1400 TB	2517	A3	7/8	1.3/4	31/32	
19.00	18.95	5 3V 1900 TB	3030	B3	7/8	3	11/16	6 3V 1900 TB	3030	B3	13/32	3	9/32	
25.00	24.95	5 3V 2500 TB	3030	B3	11/16	3	11/16	6 3V 2500 TB	3030	B3	13/32	3	9/32	
33.50	33.45	5 3V 3350 TB	3030	C3	11/16	3	11/32	6 3V 3350 TB	3030	C3	13/32	3	9/64	

3V Taper Bushing Pulley

OD	PD	8 Groove F=3 17/32							10 Groove F=4 11/32					
		Size	Bush	Type	K	L	M	Size	Bush	Type	K	L	M	
4.75	4.70	8 3V 475 TB	2517	A1	1.25/32	1.3/4	-	4 3V 475 TB	2517	A1	2.19/32	1.3/4	-	
5.00	4.95	8 3V 500 TB	2517	A1	1.25/32	1.3/4	-	4 3V 500 TB	2517	A1	2.19/32	1.3/4	-	
5.30	5.25	8 3V 530 TB	2517	A1	1.1/32	1.3/4	3/4	4 3V 530 TB	2517	A1	1.27/32	1.3/4	3/4	
5.60	5.55	8 3V 560 TB	2517	A1	1/4	1.3/4	1.17/32	4 3V 560 TB	2517	A1	1/2	1.3/4	2.3/32	
6.00	5.95	8 3V 600 TB	2517	A1	1/4	1.3/4	1.17/32	4 3V 600 TB	2517	A1	1/2	1.3/4	2.3/32	
6.50	6.45	8 3V 650 TB	2517	A1	1/4	1.3/4	1.17/32	4 3V 650 TB	2517	A1	1/2	1.3/4	2.3/32	
6.90	6.85	8 3V 690 TB	2517	A1	1/4	1.3/4	1.17/32	4 3V 690 TB	2517	A1	1/2	1.3/4	2.3/32	
8.00	7.95	8 3V 800 TB	3020	A1	1/2	2	1.1/32	4 3V 800 TB	3020	A1	27/32	2	1.1/2	
10.60	10.55	8 3V 1060 TB	3020	A2	1/2	2	1.1/32	4 3V 1060 TB	3020	A2	27/32	2	1.1/2	
14.00	13.95	8 3V 1400 TB	3030	A3	-	3	17/32	4 3V 1400 TB	3535	A2	-	3.1/2	27/32	
19.00	18.95	8 3V 1900 TB	3535	A3	-	3.1/2	1/32	4 3V 1900 TB	3535	A3	-	3.1/2	27/32	
25.00	24.95	8 3V 2500 TB	3535	A3	-	3.1/2	1/32	4 3V 2500 TB	4040	A3	-	4	11/32	
33.50	33.45	8 3V 3350 TB	4040	C3	15/64	4	15/64	4 3V 3350 TB	4040	C3	11/64	4	11/64	



Dimensions in ins

OD	PD	2 Groove F=1 11/16						3 Groove F=1 3/32					
		Size	Bush	Type	K	L	M	Size	Bush	Type	K	L	M
7.10	7.00	2 5V 710 TB	2517	B1	-	1.3/4	1/16	3 5V 710 TB	2517	B1	5/8	1.3/4	-
7.50	7.40	2 5V 750 TB	2517	B1	-	1.3/4	1/16	3 5V 750 TB	2517	B1	5/8	1.3/4	-
8.00	7.90	2 5V 800 TB	2517	B1	-	1.3/4	1/16	3 5V 800 TB	2517	B1	5/8	1.3/4	-
8.50	8.40	2 5V 850 TB	2517	B2	-	1.3/4	1/16	3 5V 850 TB	2517	B2	5/8	1.3/4	-
9.00	8.90	2 5V 900 TB	2517	B2	-	1.3/4	1/16	3 5V 900 TB	2517	B2	5/8	1.3/4	-
9.25	9.15	2 5V 925 TB	3020	B1	-	2	5/16	3 5V 925 TB	3020	B1	-	2	3/8
9.75	9.65	2 5V 975 TB	3020	B1	-	2	5/16	3 5V 975 TB	3020	B1	-	2	3/8
10.30	10.20	2 5V 1030 TB	3020	B2	-	2	5/16	3 5V 1030 TB	3020	B2	-	2	3/8
10.90	10.80	2 5V 1090 TB	3020	B2	-	2	5/16	3 5V 1090 TB	3020	B2	-	2	3/8
11.80	11.70	2 5V 1180 TB	3020	B2	-	2	5/16	3 5V 1180 TB	3020	B2	-	2	3/8
12.50	12.40	2 5V 1250 TB	3020	B2	-	2	5/16	3 5V 1250 TB	3020	B2	-	2	3/8
13.20	13.10	2 5V 1320 TB	3020	B3	-	2	5/16	3 5V 1320 TB	3020	B3	-	2	3/8
14.00	13.90	2 5V 1400 TB	3020	B3	-	2	5/16	3 5V 1400 TB	3020	B3	-	2	3/8
15.00	14.90	2 5V 1500 TB	3020	B3	-	2	5/16	3 5V 1500 TB	3020	B3	-	2	3/8
16.00	15.90	2 5V 1600 TB	3020	B3	-	2	5/16	3 5V 1600 TB	3020	B3	-	2	3/8
21.20	21.10	2 5V 2120 TB	3535	C3	3/8	3.1/2	1.7/16	3 5V 2120 TB	3535	C3	-	3.1/2	1.1/8
28.00	27.90	2 5V 2800 TB	3535	C3	3/8	3.1/2	1.7/16	3 5V 2800 TB	3535	C3	-	3.1/2	1.1/8

5V Taper Bushing Pulley

OD	PD	4 Groove F=3 1/16						5 Groove F=3 3/4					
		Size	Bush	Type	K	L	M	Size	Bush	Type	K	L	M
7.10	7.00	4 5V 710 TB	2517	A1	1.5/16	1.3/4	-	5 5V 710 TB	3020	A1	1/2	2	1.1/4
7.50	7.40	4 5V 750 TB	2517	A1	1.5/16	1.3/4	-	5 5V 750 TB	3020	A1	1/2	2	1.1/4
8.00	7.90	4 5V 800 TB	2517	A1	1.5/16	1.3/4	-	5 5V 800 TB	3020	A1	1/2	2	1.1/4
8.50	8.40	4 5V 850 TB	2517	A2	1.5/16	1.3/4	-	5 5V 850 TB	3020	A1	1/2	2	1.1/4
9.00	8.90	4 5V 900 TB	2517	A2	1.5/16	1.3/4	-	5 5V 900 TB	3020	A1	1/2	2	1.1/4
9.25	9.15	4 5V 925 TB	3020	A1	1/2	2	9/16	5 5V 925 TB	3020	A1	1/2	2	1.1/4
9.75	9.65	4 5V 975 TB	3020	A1	1/2	2	9/16	5 5V 975 TB	3020	A1	1/2	2	1.1/4
10.30	10.20	4 5V 1030 TB	3020	A2	1/2	2	9/16	5 5V 1030 TB	3020	A2	1/2	2	1.1/4
10.90	10.80	4 5V 1090 TB	3020	A2	1/2	2	9/16	5 5V 1090 TB	3020	A2	1/2	2	1.1/4
11.80	11.70	4 5V 1180 TB	3020	A2	1/2	2	9/16	5 5V 1180 TB	3020	A2	1/2	2	1.1/4
12.50	12.40	4 5V 1250 TB	3030	A2	-	3	1/16	5 5V 1250 TB	3030	A2	-	3.1/2	1/4
13.20	13.10	4 5V 1320 TB	3030	A2	-	3	1/16	5 5V 1320 TB	3535	A2	-	3.1/2	1/4
14.00	13.90	4 5V 1400 TB	3535	B3	-	3.1/2	7/16	5 5V 1400 TB	3535	A3	-	3.1/2	1/4
15.00	14.90	4 5V 1500 TB	3535	B3	-	3.1/2	7/16	5 5V 1500 TB	3535	A3	-	3.1/2	1/4
16.00	15.90	4 5V 1600 TB	3535	B3	-	3.1/2	7/16	5 5V 1600 TB	3535	A3	-	3.1/2	1/4
21.20	21.10	4 5V 2120 TB	3535	B3	-	3.1/2	7/16	5 5V 2120 TB	4040	B3	-	4	1/4
28.00	27.90	4 5V 2800 TB	3535	B3	-	3.1/2	7/16	5 5V 2800 TB	4040	B3	-	4	1/4
37.50	37.40	4 5V 3750 TB	4040	B3	-	4	15/16	5 5V 3750 TB	4040	B3	-	4	1/4

Dimensions in ins

OD	PD	6 Groove F=4 7/16							8 Groove F=5 13/16					
		Size	Bush	Type	K	L	M	Size	Bush	Type	K	L	L	
7.10	7.00	6 5V 710 TB	3020	A1	3/4	2	1.11/16	8 5V 710 TB	3030	A1	1	3	1.3/16	
7.50	7.40	6 5V 750 TB	3020	A1	3/4	2	1.11/16	8 5V 750 TB	3030	A1	1	3	1.3/16	
8.00	7.90	6 5V 800 TB	3020	A1	3/4	2	1.11/16	8 5V 800 TB	3030	A1	1	3	1.3/16	
8.50	8.40	6 5V 850 TB	3020	A1	3/4	2	1.11/16	8 5V 850 TB	3535	A1	1	3	1.3/16	
9.00	8.90	6 5V 900 TB	3020	A1	3/4	2	1.11/16	8 5V 900 TB	3535	A1	1	3.1/2	1.3/16	
9.25	9.15	6 5V 925 TB	3535	A1	-	3.1/2	15/16	8 5V 925 TB	3535	A1	1	3.1/2	1.5/16	
9.75	9.65	6 5V 975 TB	3535	A1	-	3.1/2	15/16	8 5V 975 TB	3535	A1	1	3.1/2	1.5/16	
10.30	10.20	6 5V 1030 TB	3535	A1	-	3.1/2	15/16	8 5V 1030 TB	3535	A1	1	3.1/2	1.5/16	
10.90	10.80	6 5V 1090 TB	3535	A1	-	3.1/2	15/16	8 5V 1090 TB	3535	A1	1	3.1/2	1.5/16	
11.80	11.70	6 5V 1180 TB	3535	A2	-	3.1/2	15/16	8 5V 1180 TB	3535	A1	1	3.1/2	1.5/16	
12.50	12.40	6 5V 1250 TB	3535	A2	-	3.1/2	15/16	8 5V 1250 TB	4040	A1	1/4	4	1.9/16	
13.20	13.10	6 5V 1320 TB	3535	A2	-	3.1/2	15/16	8 5V 1320 TB	4040	A1	1/4	4	1.9/16	
14.00	13.90	6 5V 1400 TB	3535	A2	-	4	7/16	8 5V 1400 TB	4040	A2	1/4	4	1.9/16	
15.00	14.90	6 5V 1500 TB	4040	A2	-	4	7/16	8 5V 1500 TB	4040	A2	1/4	4	1.9/16	
16.00	15.90	6 5V 1600 TB	4040	A3	-	4	7/16	8 5V 1600 TB	4040	A3	1/4	4	1.9/16	
21.20	21.10	6 5V 2120 TB	4040	A3	-	4	7/16	8 5V 2120 TB	4040	A3	1/4	4	1.9/16	
28.00	27.90	6 5V 2800 TB	4040	A3	-	4	7/16	8 5V 2800 TB	4545	A3	1/4	4.1/2	1.1/16	
37.50	37.40	6 5V 3750 TB	4545	B3	-	4.1/2	1/16	8 5V 3750 TB	4545	A3	1/4	4.1/2	1.1/16	

5V Taper Bushing Pulley

OD	PD	10 Groove F= 7 3/16						
		Size	Bush	Type	K	L	M	
8.00	7.90	10 5V 800 TB	3030	A1	1	3.1/2	3.3/16	
8.50	8.40	10 5V 850 TB	3030	A1	1	4	3.3/16	
9.00	8.90	10 5V 900 TB	3535	A1	1	4	3.11/16	
9.25	9.15	10 5V 925 TB	4040	A1	1	4	2.3/16	
9.75	9.65	10 5V 975 TB	4040	A1	1	4	2.3/16	
10.30	10.20	10 5V 1030 TB	4040	A1	1	4	2.3/16	
10.90	10.80	10 5V 1090 TB	4040	A1	1	4	2.3/16	
11.80	11.70	10 5V 1180 TB	4040	A1	1	4	2.3/16	
12.50	12.40	10 5V 1250 TB	4040	A2	3/4	4	2.7/16	
13.20	13.10	10 5V 1320 TB	4040	A2	3/4	4	2.7/16	
14.00	13.90	10 5V 1400 TB	4545	A2	3/4	4.1/2	1.15/16	
15.00	14.90	10 5V 1500 TB	4545	A2	3/4	4.1/2	1.15/16	
16.00	15.90	10 5V 1600 TB	4545	A2	3/4	4.1/2	1.15/16	
21.20	21.10	10 5V 2120 TB	4545	A3	3/4	4.1/2	1.15/16	
28.00	27.90	10 5V 2800 TB	4545	A3	3/4	4.1/2	1.15/16	
37.50	37.40	10 5V 3750 TB	4545	A3	3/4	4.1/2	1.15/16	

Dimensions in ins

OD	PD	4 Groove F=4 7/8						5 Groove F=6					
		Size	Bush	Type	E	L	M	Size	Bush	Type	E	L	M
12.50	12.30	4 8V 1250 TB	4040	A1	-	4	7/8	5 8V 1250 TB	4545	A1	-	4.1/2	1.1/2
13.20	13.00	4 8V 1320 TB	4040	A1	-	4	7/8	5 8V 1320 TB	4545	A1	-	4.1/2	1.1/2
14.00	13.80	4 8V 1400 TB	4545	A1	-	4.1/2	3/8	5 8V 1400 TB	4545	A1	-	4.1/2	1.1/2
15.00	14.80	4 8V 1500 TB	4545	A1	-	4.1/2	3/8	5 8V 1500 TB	4545	A1	-	4.1/2	1.1/2
16.00	15.80	4 8V 1600 TB	4545	A2	-	4.1/2	3/8	5 8V 1600 TB	4545	A1	-	4.1/2	1.1/2
17.00	16.80	4 8V 1700 TB	4545	A2	-	4.1/2	3/8	5 8V 1700 TB	4545	A2	-	4.1/2	1.1/2
18.00	17.80	4 8V 1800 TB	4545	A2	-	4.1/2	3/8	5 8V 1800 TB	4545	A2	-	4.1/2	1.1/2
19.00	18.80	4 8V 1900 TB	4545	A2	-	4.1/2	3/8	5 8V 1900 TB	4545	A2	-	4.1/2	1.1/2
20.00	19.80	4 8V 2000 TB	4545	A2	-	4.1/2	3/8	5 8V 2000 TB	4545	A2	-	4.1/2	1.1/2
21.20	21.00	4 8V 2120 TB	4545	A3	-	4.1/2	3/8	5 8V 2120 TB	4545	A3	-	4.1/2	1.1/2
22.40	22.20	4 8V 2240 TB	4545	A3	-	4.1/2	3/8	5 8V 2240 TB	4545	A3	-	4.1/2	1.1/2
30.00	29.80	4 8V 3000 TB	4545	A3	-	4.1/2	3/8	5 8V 3000 TB	5050	A3	-	5	1
40.00	39.80	4 8V 4000 TB	5050	B3	-	5	1/8	5 8V 4000 TB	5050	A3	-	5	1

**8V Taper Bushing Pulley**

OD	PD	6 Groove F=7 1/8						8 Groove F=9 3/8					
		Size	Bush	Type	E	L	M	Size	Bush	Type	E	L	M
12.50	12.30	6 8V 1250 TB	4545	A1	1/2	4.1/2	2.1/8	8 8V 1250 J	4545	A1	1.1/2	4.1/2	3.3/8
13.20	13.00	6 8V 1320 TB	4545	A1	1/2	4.1/2	2.1/8	8 8V 1320 J	4545	A1	1.1/2	4.1/2	3.3/8
14.00	13.80	6 8V 1400 TB	4545	A1	1/2	4.1/2	2.1/8	8 8V 1400 J	4545	A1	1.1/2	4.1/2	3.3/8
15.00	14.80	6 8V 1500 TB	4545	A1	1/2	4.1/2	2.1/8	8 8V 1500 J	4545	A1	1.1/2	4.1/2	3.3/8
16.00	15.80	6 8V 1600 TB	4545	A2	1/2	4.1/2	2.1/8	8 8V 1600 J	4545	A2	1.1/2	4.1/2	3.3/8
17.00	16.80	6 8V 1700 TB	4545	A2	1/2	4.1/2	2.1/8	8 8V 1700 M	4545	A2	1.1/2	4.1/2	3.3/8
18.00	17.80	6 8V 1800 TB	4545	A2	1/2	4.1/2	2.1/8	8 8V 1800 M	5050	A2	1	5	3.3/8
19.00	18.80	6 8V 1900 TB	4545	A2	1/2	4.1/2	2.1/8	8 8V 1900 M	5050	A2	1	5	3.3/8
20.00	19.80	6 8V 2000 TB	4545	A2	1/2	4.1/2	2.1/8	8 8V 2000 M	5050	A2	1	5	3.3/8
21.20	21.00	6 8V 2120 TB	4545	A3	1/2	4.1/2	2.1/8	8 8V 2120 M	5050	A3	1	5	3.3/8
22.40	22.20	6 8V 2240 TB	4545	A3	1/2	4.1/2	2.1/8	8 8V 2240 M	5050	A3	1	5	3.3/8
30.00	29.80	6 8V 3000 TB	5050	A3	1/2	5	1.5/8	8 8V 3000 N	5050	A3	1	5	3.3/8
40.00	39.80	6 8V 4000 TB	5050	A3	1/2	5	1.5/8	8 8V 4000 N	5050	A3	1	5	3.3/8